

EFR 9280 Aluminum Super-Core

600 - 1100 HP



EFR 9280 Iron Super-Core

600 - 1100 HP



F E A T U R E S

- Gamma-Ti turbine wheel
- Integrated Compressor Recirculation Valve (CRV)

- Dual ceramic ball bearing assembly with metal cage
- Boost Control Solenoid Valve (BCSV)
- Black Anodized Forged Milled Compressor Wheel (FMW)

- Extended tip technology
- Compressor cover with speed sensor mounting provisions

NEW!

Product - (TYPE)	Complete Turbo	Bearing Housing Material	Super-Core**	TURBINE HOUSING				
				Assembly	A/R	Inlet	Scroll	Waste-gate
9280-B	-	-	-	12801008002	0.83	T3	Single	Yes
9280-C	-	-	-	12801019009	0.92	T4	Twin	Yes
9280-D	-	-	-	12801019001	1.05	T4	Twin	No
9280-H	-	-	-	12801008006	1.45	T4	Twin	No
9280	-	Aluminum*	12807100003	-	-	-	-	-
9280	-	Iron	12807100005	-	-	-	-	-


Turbo Frame Size	B2
Comp. Wheel Inducer Dia. (mm)	74
Comp. Wheel Outer Dia. (mm)	91
Turbine Wheel Exducer Dia. (mm)	73
Turbine Wheel Outer Dia. (mm)	80

*Aluminum bearing housings require cooling

**The following components are not included as part of the Super-Core: Turbine Housing, Clamp Plate Hardware, Wastegate, and Actuator

COMPRESSOR MAP / APPLICABLE TO ALL 9280 UNITS

Comp. Wheel Inducer Dia. (mm) 72
Comp. Wheel Outer Dia. (mm) 91

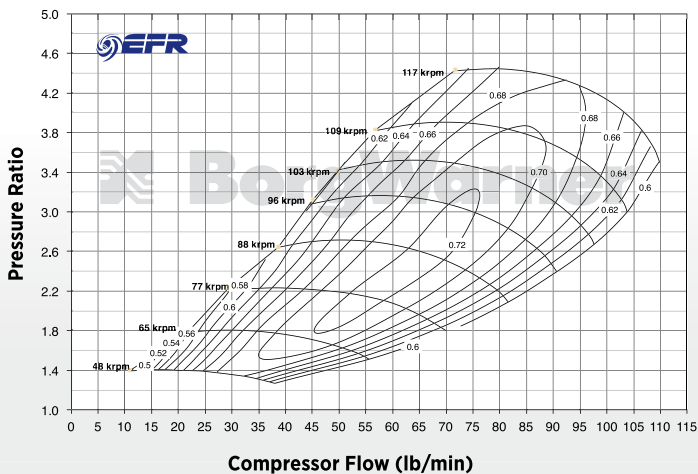

OPTIONAL HARDWARE

See page 37 for: Speed Sensor, Turbine Gaskets & V-Bands, Oil Drain Gasket & Fitting, Actuators & Brackets



H-Type Turbine Housing

12801008006

SEE PAGE 35 FOR FRAME DIMENSIONS

SEE PAGE 61 FOR SPEED SENSOR INSTALLATION DETAILS